
FALIZ PAJOUHESH PARS CO.

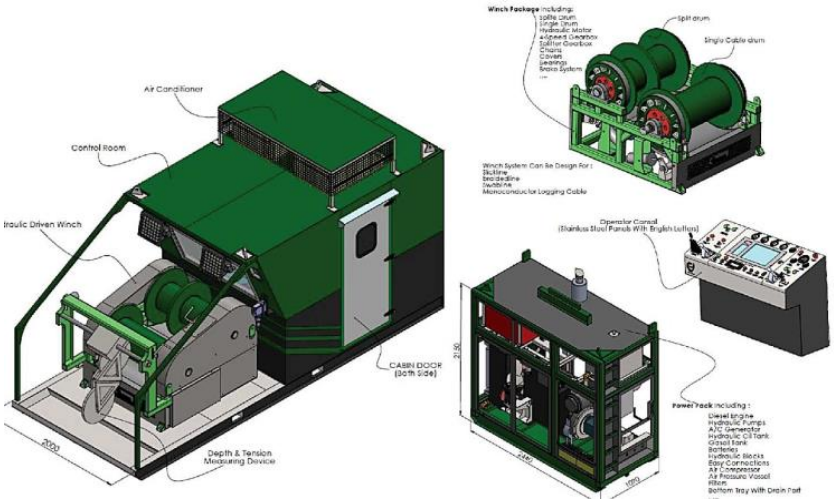

F1.A5

Skid Mounted Double Drum Wireline Unit with PowerPack

Model	*Description*	
Dimension	Control Skid 5.00m L x 2.00m W x 2.25m H	Power Pack 2.44m L x 2.15 m W x 1.09m H
Environment	Standard configuration can operate in -10 to +50 degrees C temperatures.	
Structure	STEEL frame all welded construction	
Drum Line Full Capacity	Single drum : 25000 ft of 1/4” Split drum : 25000 ft of (0.108” & 0.125”)	
Hydraulic system	Closed-Loop Hydraulic System	
Measuring Heads	NOV Elmar / Benchmark	
Winch drive	Variable hydromotor Rexroth + 4Speed FUNK transmission + Splitter Gearbox	
Spooling system	Hydraulic control	
Power pack	Powerful 4 cylinder Perkins/Volvo/Isuzu diesel engine	
Control panel	Clearly laid out ergonomic anodized aluminum control panel with English text as standard	
Depth & Tension display	Operates in conjunction with CombiGauge hydro-mechanical combined depth and tension gauge	
Feature	Integral enclosed operator cabin Climate control operator cabin Four point lifting slings Integral forklift pockets	

No.721, phase 2, Industrial zone 2 Andimeshk Road, Ahvaz, Khuzestan

www.falizgroup.com info@falizgroup.com

061-33739164-7 061-33739163 09163001892-09168089194